
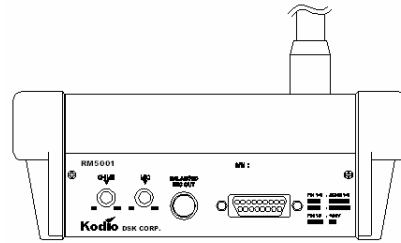


# RM-5001 CHIME PAGING MICROPHONE WITH ZONE SELECTOR

## Front & Rear Views

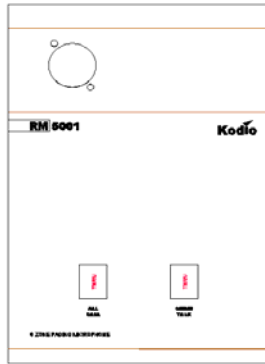

**RM5001** when paging to specific zones is required in which the main rack is located away from the paging station. It is a more economical way of remote zone paging when the number of zones in a setup is small, considering the number of cable used.

### Features

- Sensitive back electret condenser gooseneck mic with illuminated ring indicator.
- 4 tone chime broadcast prior to mic activation.
- Chime & mic volume adjustment.
- 6 zones selectors and ALL CALL with priority override for BGM muting at zone selector.
- Balanced mic output level for low noise transmission.
- Powered by 24V DC from main equipment rack.

### Technical Specifications

<b>System</b>	<b>Condenser microphone with cardioid pattern</b>
<b>Operating Voltage</b>	<b>24V DC via adaptor</b>
<b>Power Consumption (at all call)</b>	<b>150mA</b>
<b>Output Level</b>	<b>Electronically balanced mic out 775mV</b>
<b>Output Impedance</b>	<b>600 Ohm</b>
<b>Data Connection</b>	<b>15 pin D female connector</b>
<b>Output connection</b>	<b>¼" stereo phone jack</b>
<b>Chime</b>	<b>4 tone chime (Up &amp; Down)</b>
<b>Frequency Response</b>	<b>100-12kHz (+/- 3dB; 0dB out)</b>
<b>Signal to noise ratio</b>	<b>60dB (@ 1KHz)</b>
<b>Indicators</b>	<b>Chime, Ready &amp; Zone Select</b>
<b>Operating Distance</b>	<b>Less than 100m</b>
<b>Dimensions (w) x (h) x (d)</b>	<b>150 x 186 x 62</b>
<b>Gooseneck mic length</b>	<b>440 mm</b>
<b>Weight (gms)</b>	<b>900</b>
<b>colour</b>	<b>Black</b>

