


# PMH880S

# EUROPOWER

## Technical Specifications

Version 1.3 November 2004

ENGLISH

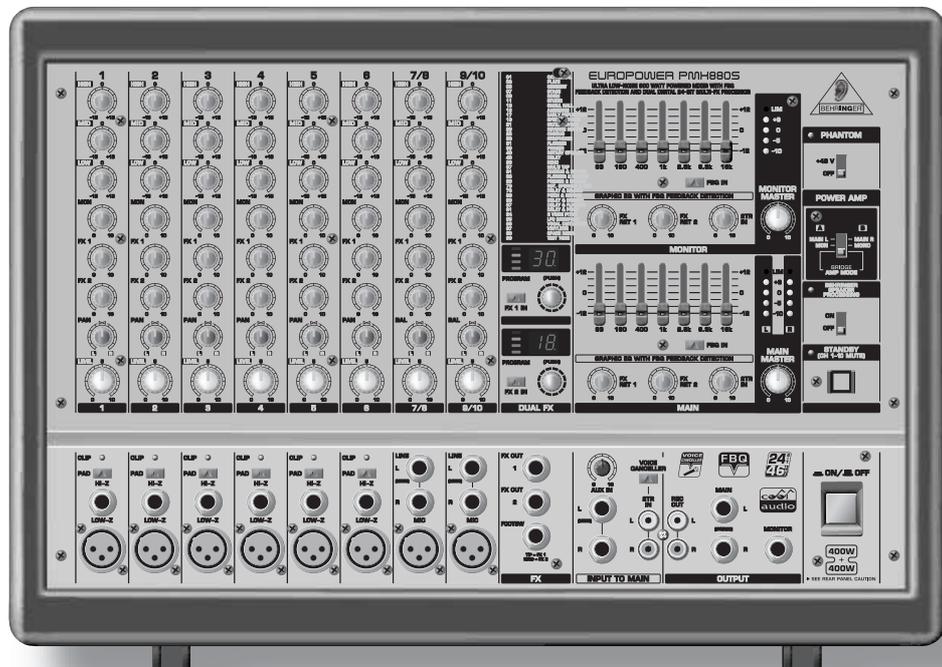

[www.behringer.com](http://www.behringer.com)



# EUROPOWER PMH880S

---

# EUROPOWER

## Ultra-Compact 2 x 400-Watt 10-Channel Powered Mixer with Dual 24-Bit Multi-FX Processor and FBQ Feedback Detection System

- ▲ Super-compact 2 x 400-Watt stereo powered mixer
- ▲ Revolutionary and patented COOLAUDIO Amplifier Technology: Enormous power, incredible sonic performance and super-light weight
- ▲ Ultra-compact dimensions at nearly half the depth and weight of conventional powered mixers means no more lugging around dead weight
- ▲ 10-channel mixer section comprised of 6 mono and 2 stereo channels plus separate tape returns
- ▲ 2 independent 24-bit stereo FX processors with 99 outstanding VIRTUALIZER presets including reverb, delay, chorus, flanger and more
- ▲ Revolutionary FBQ Feedback Detection System instantly reveals critical frequencies for easy feedback removal
- ▲ 8 high-quality mic preamps with switchable +48 V phantom power for condenser microphones
- ▲ Effective, extremely musical 3-band EQ, switchable pad and clip LEDs on all mono channels
- ▲ Stereo 7-band graphic EQ allows precise frequency correction of monitor and main outputs
- ▲ Voice Canceller function removes singer's voice from recordings for Karaoke applications
- ▲ Selectable stereo (main L/R), double mono (main/monitor) or bridged mono amplifier operation mode
- ▲ Speaker Processing function adjusts frequency response to match professional speaker systems like BEHRINGER EUROLIVE series etc.
- ▲ Standby switch mutes all input channels during breaks while background music is provided via tape inputs
- ▲ Adjustable stereo aux input for connecting external signal sources
- ▲ Internal switch-mode power supply for maximum flexibility (100 - 240 V~), noise-free audio, superior transient response and lowest possible power consumption
- ▲ Extremely rugged construction ensures long life even under most demanding conditions
- ▲ Rack mount brackets included
- ▲ Conceived and designed by BEHRINGER Germany

# EUROPOWER PMH880S

## SPECIFICATIONS

PMH880S	
<b>MICROPHONE INPUTS</b>	
Type	XLR, electronically balanced input circuit
Mic E.I.N. (20 Hz - 20 kHz)	
@ 0 $\Omega$ source resistance	-112 dB / 114 dB A-weighted
@ 50 $\Omega$ source resistance	-112 dB / 114 dB A-weighted
@ 150 $\Omega$ source resistance	-112 dB / 114 dB A-weighted
Frequency response	< 10 Hz - 200 kHz (-1 dB) < 10 Hz - > 200 kHz (-3 dB)
Gain	+30 dB, +10 dB with pad
Max. input level	+12 dBu @ +10 dB gain
Impedance	approx. 2.2 k $\Omega$ balanced / 1.1 k $\Omega$ unbalanced
Signal-to-noise ratio	110 dB / 114 dB A-weighted (0 dBu In @ +10 dB gain)
Noise (THD + N)	0.001% / 0.0007% A-weighted
<b>MONO LINE INPUTS</b>	
Type	1/4" TS connectors, balanced
Impedance	approx. 20 k $\Omega$ , balanced
Max. input level	+21 dBu
<b>STEREO LINE INPUTS</b>	
Type	1/4" TRS connectors, unbalanced
Impedance	approx. 100 k $\Omega$ , unbalanced
Max. input level	+21 dBu
<b>EQUALIZER</b>	
Low	80 Hz / +/-15 dB
Mid	2.5 kHz / +/-15 dB
High	12 kHz / +/-15 dB
<b>2 TRACK INPUT</b>	
Type	RCA
Impedance	approx. 10 k $\Omega$
<b>PREAMP OUTPUTS</b>	
<b>MAIN</b>	
Type	1/4" TS connectors, unbalanced
Impedance	approx. 150 $\Omega$ , unbalanced
Max. output level	+21 dBu
<b>MONITOR</b>	
Type	1/4" TS connectors, unbalanced
Impedance	approx. 150 $\Omega$ , unbalanced
Max. output level	+21 dBu
<b>STEREO OUTPUTS</b>	
Type	1/4" TRS connectors, unbalanced
Impedance	approx. 150 $\Omega$ , unbalanced
Max. input level	+21 dBu
Type	RCA
Impedance	approx. 1 k $\Omega$
Max. input level	+21 dBu
<b>MAIN MIX SYSTEM DATA</b>	
Noise	
MAIN MIX @ - $\infty$	-102 dB/-106 dB A-weighted
Channel fader - $\infty$	
MAIN MIX @ 0 dB	-88 dB/-91 dB A-weighted
Channel fader - $\infty$	
MAIN MIX @ 0 dB	-84 dB/-86 dB A-weighted
Channel fader @ 0 dB	

# EUROPOWER PMH880S

LOUDSPEAKER OUTPUTS	
Type	NEUTRIK® SPEAKON®-compatible
Load impedance	
MAIN L/R	4 - 8 Ω
MONITOR/MAIN MONO	4 - 8 Ω
MAIN MONO/MAIN MONO	4 - 8 Ω
BRIDGE	8 - 16 Ω
DSP	
Converter	24-bit Delta-Sigma, 64/128-times oversampling
Dynamics D/A	90 dB
Sampling rate	46.875 kHz
Delay Time	max. 5 secs
Signal run time (Line In > Line Out)	approx. 1.5 msec
DISPLAY	
Type	2 x 2-digit, 7-segment LED
AMPLIFIER	
Output power @ 4 Ω	2 x 400 W
POWER SUPPLY	
Mains voltage	100 - 240 V~, 50 / 60 Hz
Power consumption	680 W
Fuse	<b>T 6.3 A H 250V</b>
Mains connector	IEC standard receptacle
DIMENSIONS/WEIGHT	
Dimensions (H x W x D)	approx. 12 2/5" x 18 1/10" x 8 3/5"
	approx. 315 mm x 460 mm x 220 mm
Weight	9.4 kg
	20.73 lb.

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

Technical specifications and appearance subject to change without notice. The information contained herein is correct at the time of printing. The names of companies, institutions or publications pictured or mentioned and their respective logos are registered trademarks of their respective owners. Their use neither constitutes a claim of the trademarks by BEHRINGER® nor affiliation of the trademark owners with BEHRINGER®. BEHRINGER® accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colours and specification may vary slightly from product. Products are sold through our authorised dealers only. Distributors and dealers are not agents of BEHRINGER® and have absolutely no authority to bind BEHRINGER® by any express or implied undertaking or representation. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studioteknik GmbH. BEHRINGER® is a registered trademark.

ALL RIGHTS RESERVED. © 2004 BEHRINGER Spezielle Studioteknik GmbH,  
Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany.  
Tel. +49 2154 9206 0, Fax +49 2154 9206 4903