

# SC-500DN (NTSC) / SC-501DN (PAL)



## True Day/Night box camera




### Features

- 1/3" SONY Super HAD CCD
- 550 TV Lines
- True Day/Night (ICR)
- Min. Illumination: 0.1 Lux (B/W)
- Auto White Balance
- AGC, BLC, Flickerless (On/Off)
- DC12V

### Specification

ITEM	SC-500DN	SC-501DN
Signal System	NTSC	PAL
Image Sensor	1/3" SONY Super HAD CCD	
Total/Effective Pixels	410K/380K	470K/440K
Resolution	550 TV lines	
Shutter Speed	1/60~1/100,000 sec.	1/50~1/100,000 sec.
Sync. System	Internal	
Scanning System	2:1 Interlace	
S/N Ratio	More than 48dB (AGC Off)	
Min. Illumination	0.3 Lux(Normal), 0.1 Lux(B/W)	
Video Output	VBS 1.0Vp-p(75Ω Composite)	
White Balance	Auto	
AGC, BLC, Flickerless	On / Off	
Camera Control	DIP Switch	
Day&Night Type	ICR (AGC type)	
Lens mount	C/CS Mount	
Power Requirements	DC 12V	
Power Consumption	Max. 7W/600mA	
Operating Temp.	-10°C ~ +50°C	
Ambient Humidity	90% RH Max	
Dimension	65(W) x 59.5(H) x 122.5(L)mm	
Weight	430g	

### Dimensions (UNIT : mm)

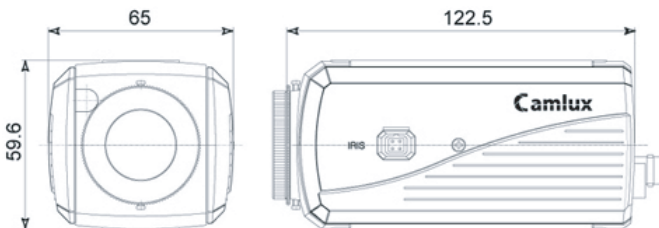

Rear View

### Optional model

- SC-505DN / SC-506DN : Dual voltage

Specification are subject to change without any prior notice.