


SC-CE400HN

1/2" Ex-View Industrial Color Camera



Dimensions (UNIT : mm)

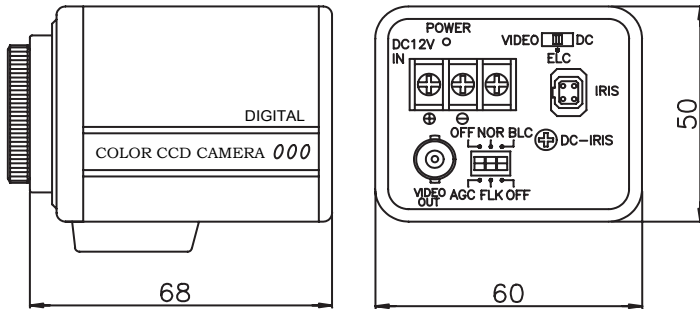

Features

- 1/2" Interline HAD CCD (SONY)
- Super High Sensitivity
- Lens Control : DC / Video / ELC (Shutter Iris)
- Low Smear

Specification

MODEL	CS-CE400HN	CS-CE401HP
Signal System	NTSC	PAL
Effective Pixels	410K/380K	470K/440K
Pick-Up Device	1/2" Interline B&W Exview HAD CCD (SONY)	
Lens Mount	C/CS Mount	
Lens Control	DC/Video/ELC (Shutter Iris)	
Scanning System	2:1 Interlace	
Sync. System	Internal	
Scanning Frequency	59.94Hz(VD)	50Hz(VD)
Resolution	480TV Lines	470TV Lines
S/N Ratio	More than 50dB	
Standard Illuminance	2000 Lux (3200°K)	
Sensitivity	0.05 Lux	
Video Output	1.0 Vp-p Composite (75Ω)	
Gain Control	Auto (AGC Max Gain On/Off)	
Exposure	Auto	
Flickerless	On/Off	
White Balance	Auto	
Back Light	On/Off	
Shutter Speed	1/60~1/100,000sec	1/50~1/100,000sec
Power Source	DC 10V ~14V	
Power Consumption	Less than 180mA	
Operating Temp.	-10°C ~ 50°C (Humidity : 0% RH ~80% RH)	
Storage Temp.	-20°C ~ 60°C (Humidity : 0% RH ~85% RH)	
Dimensions(mm)	60(W) X 50(H) X 68(D) or 95(D)	
Weight	240g	

Specification are subject to change without any prior notice.