

VD-500 (NTSC) / VD-501 (PAL)



3-Axis Vandal Proof Dome Camera




Features

- 1/3" SONY HQ1 Sensor
- 550 TV Lines
- Dip Switch Controls
- 3-Axis Bracket
- 2nd Video-out Available
- White Pearl Housing

Specification

ITEM	VD-500	VD-501
Signal System	NTSC	PAL
Image Sensor	1/3" SONY HQ1 Sensor	
Total/Effective Pixels	410K/380K	470K/440K
Shutter Speed	1/60~1/100,000 sec.	1/50~1/100,000 sec.
Sync. System	Internal	
Scanning System	2:1 Interlace	
S/N Ratio	More than 48dB	
Video Output	VBS 1.0Vp-p(75 Ω Composite)	
Min. Illumination	0.3 Lux	
Resolution	550TV Lines	
Lens Options	Fixed: 3.8 mm	
Dip Switch Control	AGC on / AGC off FLC on / FLC off BLC on / BLC off	
Gamma	0.45	
Power Supply	DC 12V	
Operating Temp.	-10°C ~ +50°C	
Dimension	145mm(W) x 101mm(H)	

Dimensions (UNIT : mm)

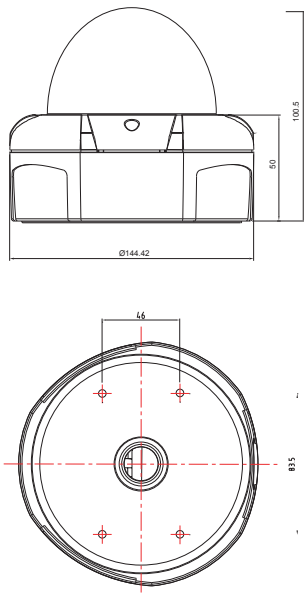

Available Models

- VD-550DN / VD-551DN : True Day/Night

Specification are subject to change without any prior notice.