

Hold-Up & Panic Devices

Hold-Up Switches


264 Money Clip

- Designed for installation in cash registers, cash boxes and at tellers' windows
- When activated, sends an immediate signal to either the police or central office
- Single pole double-throw contacts
- Recessed screws provided for easy mounting
- Dimensions:
158mm L x 57mm W x 19mm D




266 Foot Rail

- Reliable easy to operate foot activated hold-up device
- Housing made from rugged cast aluminium
- Designed to minimize the possibility of false alarms while permitting unobtrusive operation
- Indicator flag locks when alarm is tripped
- Dimensions:
460mm L x 90mm W x 120mm H

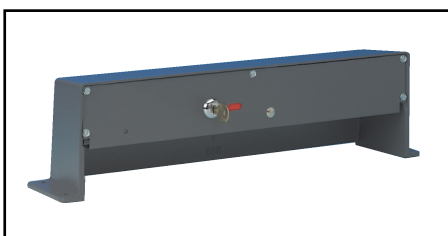

269R Hold-Up Switch

- Double-pole double-throw contacts for multi-notifications
- Switch design provides totally silent operation
- Twin 45° screw terminals with EOL resistor splicing terminal
- Adhesive pads for temporary positioning prior to screw mounting
- Operating temp: 14°F to 140°F
- Listed for UL636 Hold-Up alarm units and systems
- Dimensions:
89mm L x 51mm W x 32mm D

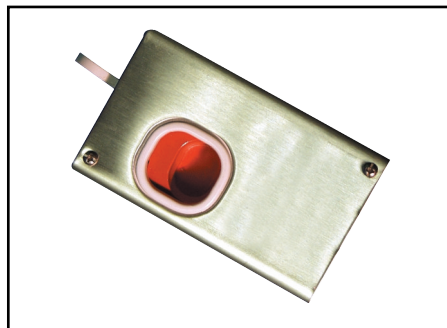


270R Hardwired Hold-Up Switch In Plastic Case

- Switch Type: Plunger type DPDT
- Switch action: Selectable latching or momentary
- Switch rating: 0.2A @ 30VDC max.
- Connections: four position 45° screw terminal block for each output side with EOL resistor splicing terminals
- Listed for UL636 Hold-Up alarm units and system
- Dimensions:
89mm L x 51mm W x 38mm D



268 Hold-Up Switch

- No chance of accidental tripping
- Smooth operation without danger of being detected
- Supplied with SPDT contacts for open or closed circuit systems

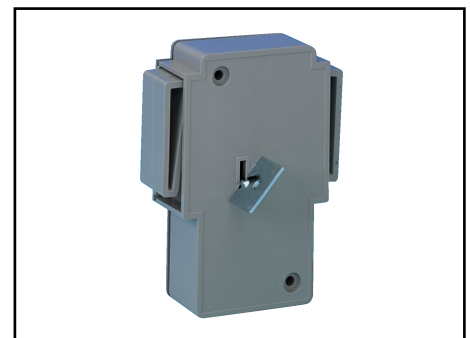

Hold-Up & Panic Devices

Panic Buttons

PB1 Panic Button Plastic Case

- UL Listed Microswitch rated at 5AMP @ 24VDC
- Tough ABS plastic
- Output: NC, NO
- Dimensions:
56mm L x 56mm W x 26mm D



PB110 Panic Button Metal Case

- Microswitch rated at 10AMP @ 250VAC
- Metal case
- Output: NC, NO
- Dimensions:
65mm L x 53mm W x 25mm D



PB2 Panic Button Plastic Case

- UL Listed Microswitch rated at 5AMP @ 24VDC
- Tough ABS plastic
- Output: NC, NO
- Dimensions:
60mm L x 45mm W x 28mm D



For more information:

Asia Pacific Headquarters: Tel: (86) 21-5257 4568
Australia Tel: (61) 1300 368 755
China Tel: (86) 755-8299 5168
Hong Kong Tel: (852) 2405 2323
www.security.honeywell.com
security.ap@honeywell.com

India Tel: (91) 124 5105671
Korea Tel: (82) 2-799 6130
Singapore Tel: (65) 6333 9563
Taiwan Tel: (886) 2-2245 1000

Automation & Control Solutions

Honeywell Security - Asia Pacific
Honeywell International Inc.
www.honeywell.com

hold-upAP0505
©2005 Honeywell International Inc.

Honeywell