

CF-60/120



CORNER SPEAKER



FEATURES

- Cover the demands of various sound system operation in every venues
- Compact arrays for wide dispersion angles (90~360°)
- Heatproof tweeter by inserting ferro-fluid in the gap of neodymium magnetic circuit
- 1" P.E.I. titanium coating diaphragm & light cone paper body woofer with foaming urethane resin for better sound reproduction.
- Incorporate a switch to allow connection to either Low Impedance or High
- Impedance Loudspeaker Networks (CF-60: 8 /166 , CF-120: 8 /83)

SPECIFICATIONS


■ ELECTRICAL

		Unit	CF-60	CF-120
Input	Constant	W	60	120
	Peak	W	100	150
Frequency response		Hz	150~18K	150~18K
Impedance			8, 166	8, 83
SPL	1m/W	dB	90	90
HF Drive		Inch	1"	1"
LF Drive		Inch	5 1/4"	5 1/4"
Cross-Over Freq		Hz	2.5k	2.5k
Dispersion		Angle	120°(H) x 90°(V)	

■ GENERAL

- WeightCF-60: 2.7kg/6lb
CF-120: 3.2kg/7lb
- Dimensions226(W) x 317(H) x 144(D)mm
8.9(W) x 12.5(H) x 5.7(D)in

CF-60

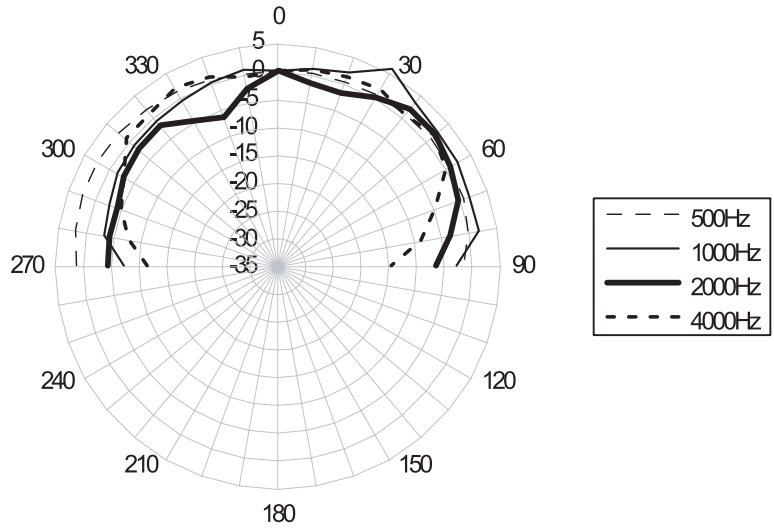

CF-120

