

## PROGRAM EXCHANGER




### FEATURES

- **AUTOMATIC PROGRAM CONVERSION**  
Connected with MATRIX equipment, it changes signal when REMOTE, TIMER, EMERGENCY is input.
- **PRIORITY FUNCTION**  
By settled input signal priority, intercepting normal signal and then output priority signal.
- **4 INPUT & OUTPUT**  
For school, hotel and departments, input and output has each 4 circuits.
- **INDICATOR FUNCTION**  
For easier notice of current signal, each input has LED.

### SPECIFICATION

- **ELECTRICAL** \*0dB=0.775Vrms
  - Operation .....Automatic
  - PGM Exchanger Function .....5 Circuit
  - Indicator.....Power LED  
Remote 2 LED  
Remote 1 LED  
Timer LED  
Emergency LED
- **GENERAL**
  - Power Source .....DC 24V
  - Weight .....5kg
  - Dimensions.....482(W)×44(H)×280(D)mm

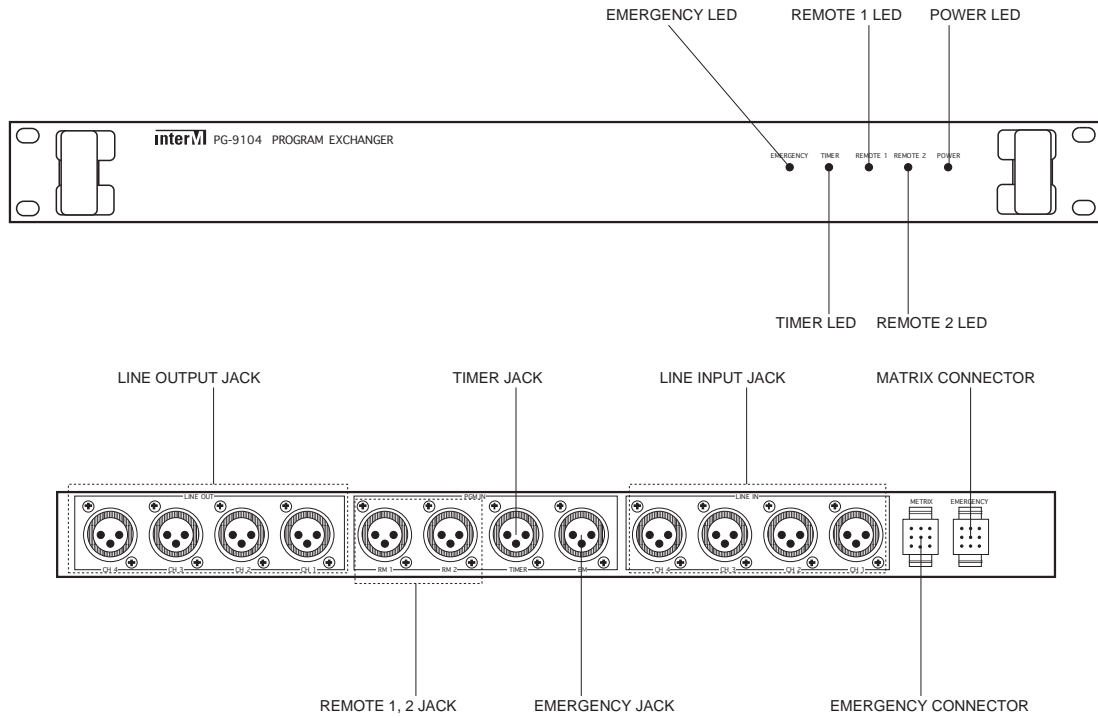

BLOCK DIAGRAM

