

# PW-9242N



## PROGRAM TIMER




### FEATURES

- User programming via front panel controls or PC interface.
- Compatible with "Voice File" device.
- Timer controlled Switched AC Power Outlet.
- Weekly automated Self-test.
- Programming retention during loss of power.
- Standard 19" Rack mount chassis.
- Linkup with MVF-2132(Multi-Voice File).

### SPECIFICATIONS

- ELECTRICAL \* OdB=0.775Vrms
  - Input Channel(Balanced) .....5CH
  - Output Channel(Balanced) .....4CH
  - Output Level.....Maximum 1V
  - AC Power Output .....Maximum 500W
  - AC Power Output2 .....Maximum 30W
  - Data Preservation Time .....7 days and more
  - Melody Time (15 settings total – 217 seconds)
    - No. 1 .....2 seconds
    - No. 2 .....3 seconds
    - No. 3 .....3 seconds
    - No. 4 .....5 seconds
    - No. 5 .....5 seconds
    - No. 6 .....7 seconds
    - No. 7 .....7 seconds
    - No. 8 .....10 seconds
    - No. 9 .....10 seconds
    - No. 10 .....15 seconds
    - No. 11 .....20 seconds
    - No. 12 .....30 seconds
    - No. 13 .....30 seconds
    - No. 14 .....40 seconds
    - No. 15 .....60 seconds
- GENERAL
  - Power Source .....AC 100V/120V/230V/240V, 50/60Hz, DC 24V
  - Power Consumption .....11W
  - Weight .....4.5kg/9.9lb
  - Dimensions .....482(W) x 88(H) x 280(D)mm  
19(W) x 3.5(H) x 11(D)in

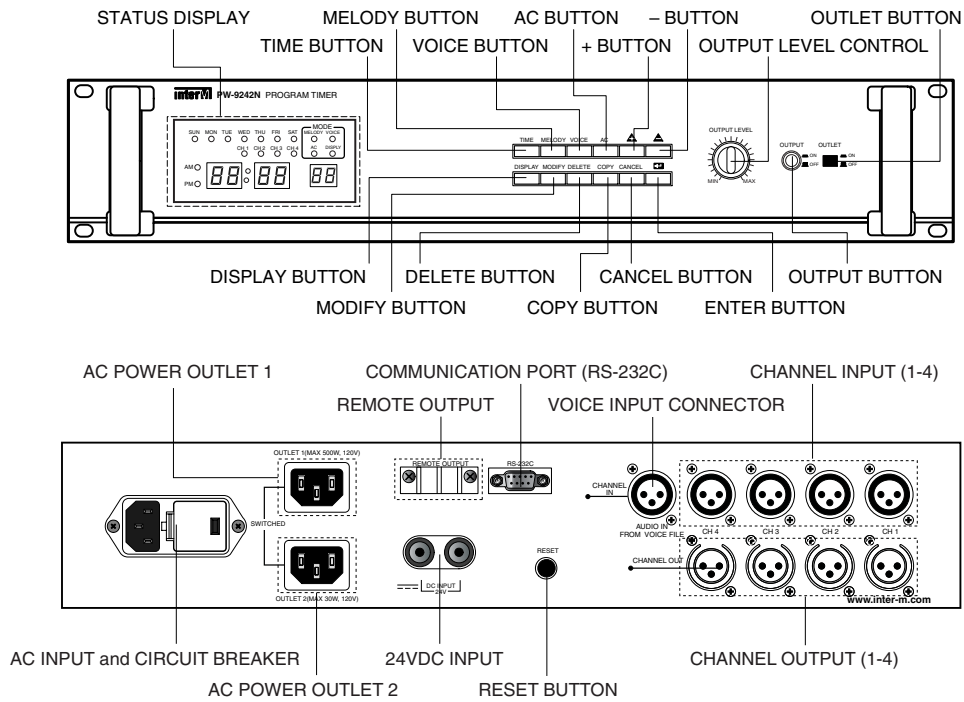

**BLOCK DIAGRAM**

