


## FRONT VIEW

Audio Distributor



## REAR VIEW

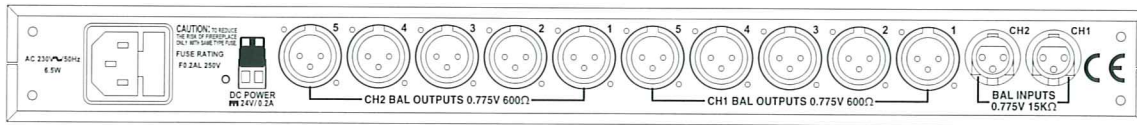

## FEATURES

- High quality electronic balanced inputs & outputs.
- All XLR connectors.
- 10ch mono, 5ch stereo.
- Output volume control.
- Low noise power supply. (operating voltage ? 15V).
- AC operation – DC 24V operation.

## SPECIFICATIONS

TECHNICAL & GENERAL	
Input sensitivity / Impedance	0.775V(0dBm)/15kΩ bal
Output level / Impedance	0.775V(0dBm)/600Ω bal
Frequency response	Less than -0.5dB(20Hz ~20kHz)
Signal to noise ratio	More than 94dB
T.H.D	Less than 0.05%(20Hz ~20kHz)
Cross-talk	More than 75dB
Power consumption	6.5W
Power Source	120V/230V/240VAC 50/60Hz
Dimensions(mm)	483(W)44(H)200(D)
(inch)	19(W)1.7(H)7.9(D)
Weight(kg/lbs)	2.9/9.9

## Drawing

