



VOLUME CONTROL

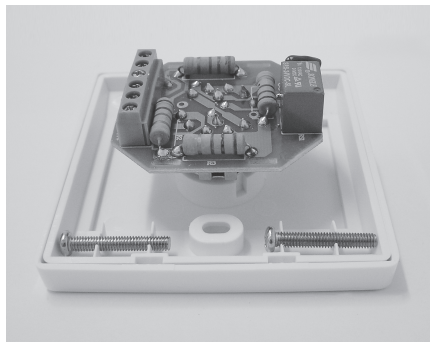

MODEL: VC-505R / 505RF

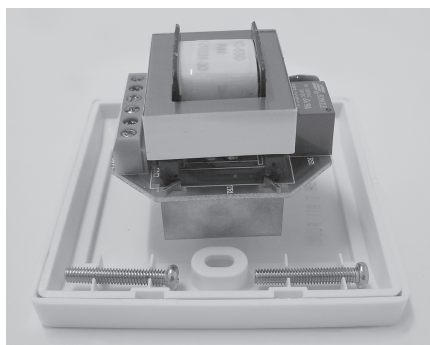

MODEL: VC-5030WF / 5060WF

FEATURES

- 5-step-in-wall volume control for 70-100V public address system.
- 'F' models include 24VDC relay to over-ride the volume control settings in case of emergency.

SPECIFICATION

Model	VC-505R	VC-505RF	VC-5030WF	VC-5060WF
Type	5-step resistive, mono		5-step auto transformer, mono	
Power Rating	6W	6W	30W	60W
24VDC Over-ride	No	Yes	Yes	Yes
Attenuation:				
Step 1 -	Off		Off	
Step 2 -	- 4dB		- 17 dB	- 18 dB
Step 3 -	- 1dB		- 11 dB	- 11 dB
Step 4 -	- 0.5dB		- 4.5 dB	- 5 dB
Step 5 -	0dB		0 dB	0 dB
Frequency Response	20Hz – 20KHz		20Hz – 20KHz	
Horizontal Dispersion	86(H) x 86(W) x 50(D) mm		86(H) x 86(W) x 62(D) mm	