

# NOVA



**AN IDEAL LIGHTING DESK FOR**

**THEATRES    SCHOOLS    CLUBS    TELEVISION  
RENTAL    EXHIBITIONS    PROMOTIONS**


By **T THEATRELIGHT**



Available in 24 Channel and 36 Channel Models  
 User-Friendly - Easy to Learn, Easy to Control  
 Compact Design for Quick Setup and Portability

The Theatrelight Nova is a versatile and easy to use lighting controller, particularly suitable for smaller shows. The Nova can be used as a simple dual-preset desk, and can also record memory scenes and chases, with timed dipless crossfading. The sound-to-light capabilities using the built-in mic make this desk a real party piece. The Nova's control output is standard USITT DMX512-1990 for easy integration with your existing equipment. The simple recording operation and instruction summary on the front panel, combined with a comprehensive, plain-English User's Manual, make this one of the easiest memory preset desks on the market. A perfect lighting board for theatres, schools, clubs and entertainment events.

- Features:
- Standard USITT-DMX512-1990 control output
  - 10 pages of 6 chase and 2 show masters (Nova 24)
  - 4 pages of 16 chase and 4 show masters (Nova 36)
  - Park Mode for dual-preset desk emulation
  - Timed dipless crossfading between cue states
  - Easy editing of individual scene or chase levels
  - Single-button crossfading simplifies long shows
  - Record and erase protection codes
  - A variety of Sound-to-Light chases with built-in mic
  - Remote step and external audio input

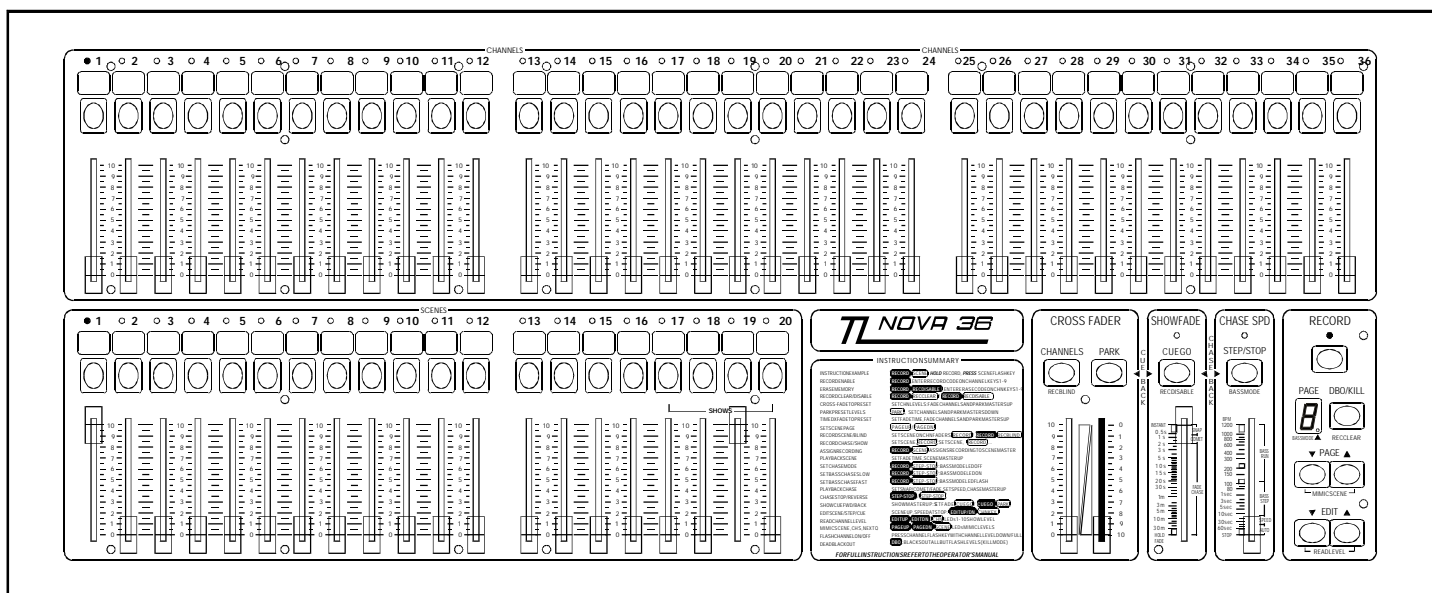

**CONSTRUCTION:**

Powder coated corrosion protected steel frame

**FADERS:**

60mm stroke linear faders with custom moulded ABS knobs

**FLASH KEYS:**

Long life heavy duty computer keys with ABS caps

**ELECTRONICS:**

CMOS micro-processor with 5-year battery backed memory

**POWER SUPPLY:**

External or internal 110 or 220~240VAC depending on specification. CE, AS/NZS standards compliant

**CONTROL OUTPUT:**

USITT DMX512-1990 Digital Multiplex System via 5 pin XLR

**REMOTE CUE STEP:**

Cue Go, Cue Back and Show Reset via 6.25mm stereo jack socket (short to earth)


**EXTERNAL AUDIO INPUT:**

Non-amplified 6.25mm mono jack

**INTERNAL MICROPHONE:**

Omni-directional Electret Microphone insert

DIMENSIONS:	Model	Length	Weight
	Nova 24	499mm	6 kg
	Nova 36	737mm	9 kg

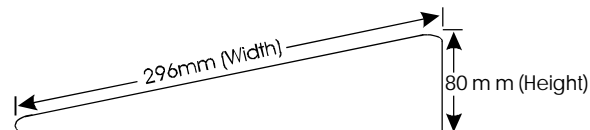

Theatrelight Ltd, 6 Rowe St, Onehunga, Auckland, New Zealand  
 Tel: 64-9-622 1187, Fax: 64-9-636 5803, Toll free fax: 0800 999 876  
 Internet: www.theatrelight.co.nz, e-mail: info@theatrelight.co.nz

Your Local Distributor:

